

IN-LINE DUCT MOUNTED FAN KITS

- Quiet operation
- Exhaust to outside of building
- G4 compliant for ventilation
- RiteVent Ceiling Grille ^ is suitable for tight space installations (ie. between floors) and is an ideal retro-fit for 10" ceiling exhaust fans
- Optional 2-speed operation (2-Speed Switch - page 30) #
- Fans are rated "Continuous Run"
- Internal thermal motor cutout protection
- 220-240V, single-phase, 50Hz

Model Number	L/sec *	dB(A) @ 3m†	Watts‡
ILK100	69 / 36	41	24
ILK125	100 / 46	42	30
ILK150MTP	93 / 58	43	52
ILK150PV	149 / 105	48	50

* Maximum air flow: fan only / fan with duct and fittings as supplied

† At High Speed



^ ILK150MTP & ILK150PV models only # All models except ILK150MTP

All dimensions in mm unless otherwise stated





ILK100

Includes TD-250/100 (100mm in-line duct fan), 4m duct, internal & external grilles.

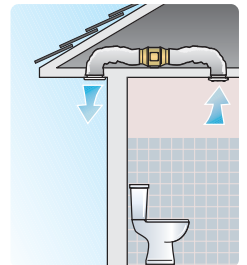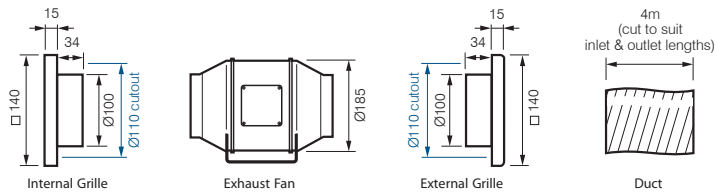



ILK125

Includes TD-350/125 (125mm in-line duct fan), 6m duct, internal & external grilles.

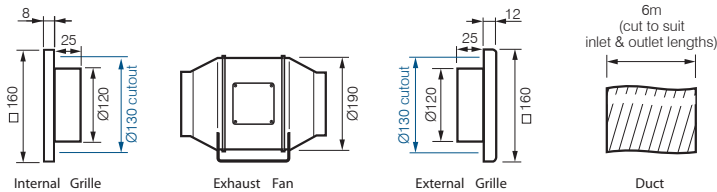

ILK150MTP

Includes MTP132 (150mm axial in-line fan), 6m duct, internal & external grilles.

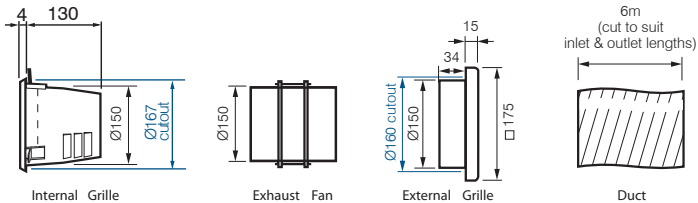

ILK150PV

Includes RIL150 (150mm mixed flow in-line fan), 6m duct, internal & external grilles.

